

## VED2 Switch - Installation and wiring instructions


### P/N VED2AHOB for 2 speed Dynamic Park Motors

#### Mounting Specifications

Panel Thickness range

Gaskets	Acceptable Panel Thickness
0	.030 to .250 (.76 to 6.35mm)
1	.030 to .109 and /147 to .157

Recommended: No gasket with panel thickness of .032, .062, .093, .125, .187 or .250

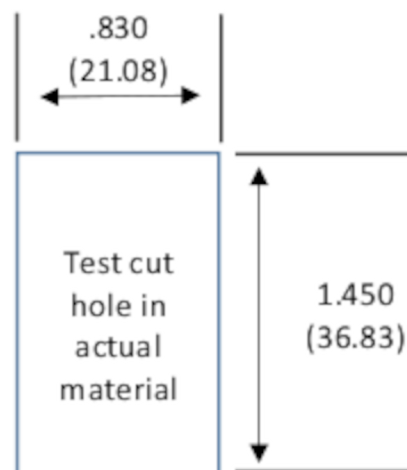

Jump to 3 (white wire) 4

Park 12v (black wire) 5

High speed (red wire) 6



1 Switch (blue wire)

2 Low speed (green wire)

3 Jump to 4 (white wire)